# Chameleon Harmonica Workwall



- Specifications -





### General

Article number	Description	Size	Surface	Nett weight
14013.310	3-pc frame	3540 x 2015 mm (BxH)	-	± 65 Kg
16001.899	Writing surface	1180 x 1950 mm (BxH)	Enamel surface of choice	± 26 kg
11208.997	Acoustic pinnig surface	1180 x 1950 mm (BxH)	PET-Felt, colour of choice	± 9,8 Kg

## Surfaces Enamel

Material type	Application	Advantages	Miniature
White enamel	Ideal for writing	Top-quality writing surface for whiteboards	
Extra Hygienic Enamel	Ideal for writing in rooms that need an advanced level of hygiene	Top-quality writing surface for whiteboards. Designed to eleminate 99% of bacteria and virusses (including COVID-19) within 24 hours.	
Mica white (enamel)	Ideal for projection	Ideal properties for projection without reflection. Wet erase with spray.	
Hybrid (enamel)	Suitable for writing and projection	A good compromise for writing and projecting on the same surface.	
Chalk grey (enamel)	Using chalks	There is no better base material for chalk boards than this enamelled steel.	ions,
Chalk green (enamel)	Using chalks	There is no better base material for chalk boards than this enamelled steel.	9
Sublimation steel	Printed whiteboard	Ideal combining the best full- colour images with writing application.	4



# Surfaces

# **PET-Felt**

AP/9-12



**Grey Tones** 












#### Monochrome

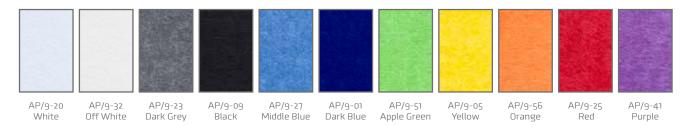

#### **Technical**

#### Whiteboard panels

Magnetic and dry erasable **Charastaristics:** 

Suitable for intensive and permanent use

Thickness: 7 mm Warranty: 2 jaar **Surface warranty:** Lifetime warranty on writability and dry erasability Warranty sublima-2 jaar ted steel surface

#### **Technical**

#### **PET-Felt panels**

Acoustic **Charastaristics:** 

Pin-able and magnetic for glass board magnets

**Acoustic values:** aw 0,25 | NRC 0,30 | Class D Flammability: Tested to EN 13501-1:2007 + A1:2009 **Density PET-felt:** 210 kg/m<sup>3</sup> Warranty: 2 years



#### Construction

#### **Enamel whiteboard panel**

1. Surface	[colour] enamel steel (Indoor Air Quality Certified to SCS-EC10.3-2014 v4.0) / sublimated steel of 0,4 mm
2. Carrier	MDF 6 mm (FSC Mix Credit)
3. Backing	0,4 mm galvanised steel sheet
4. Finishing	BlacK lacquered edges


#### PET-Felt panel

1. Surface	PET-Felt panel, 9 mm thick 60% recycled PET bottles, 40% new polyester fibre
2. Backing	0,4 mm galvanised steel sheet

#### Moveable frame

for mounting

Frame	<ul><li>Pine wood outer frame, black lacquered</li><li>Poplar wood inner frame, without lacquer</li><li>6 rubust hinges</li></ul>	
Feet	Blakc powder coated steel	
Wheels	6 rubust black castor wheels, all with brake	
Magnetic strips for mounting panels	14 pieces	
Magnetic plates		

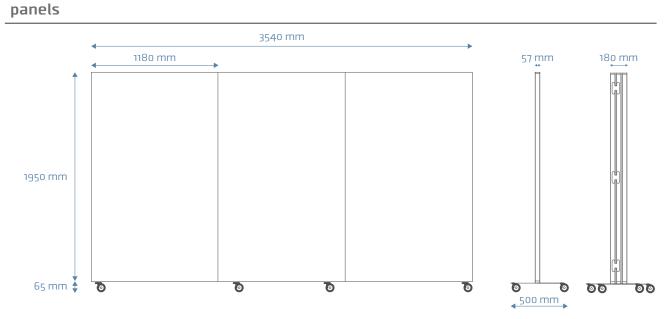



T +31(0)40 - 280 85 00 F +31(0)40 - 286 76 15

8 pieces

F +31(0)40 - 286 76 15
E info@smit-visual.nl
W chameleonwriting.com







